

Manometer

Features:

- CE-Mark approval
- Portability and simplicity one-hand operation
- Auto zero by power on
- MAX/DATA HOLD function
- User-selective resolution 0.01" / 0.1"
- Display back-light


Model: 380

Applications:

- Gas flow pressure measurement
- Pressure measurement in air conditioning systems

Specifications:

Display: 3½digit liquid crystal display (LCD) with a maximum reading of 1999.

Low battery indication: The "  " is displayed when the battery voltage drops below the operating level.

Operating environment: 0°C to 50°C, <70% R.H..

Storage environment: -20°C to 60°C, 0 to 80% R.H. with battery removed from meter.

Accuracy: Stated accuracy at 23°C ± 5°C, <75% R.H..

Dimensions: 156mm(H) x 65.5mm(W) x 35mm(D).

Weight: Approx. 178g. (including battery)

Manometer:

Sensor: Solid State


Range: 0-140" water column

Accuracy: ±2.0% full scale

Resolution: 0.01" / 0.1"

Operating Temperature: 32 to 105°F

Operating relative humidity: 15 to 90%RH

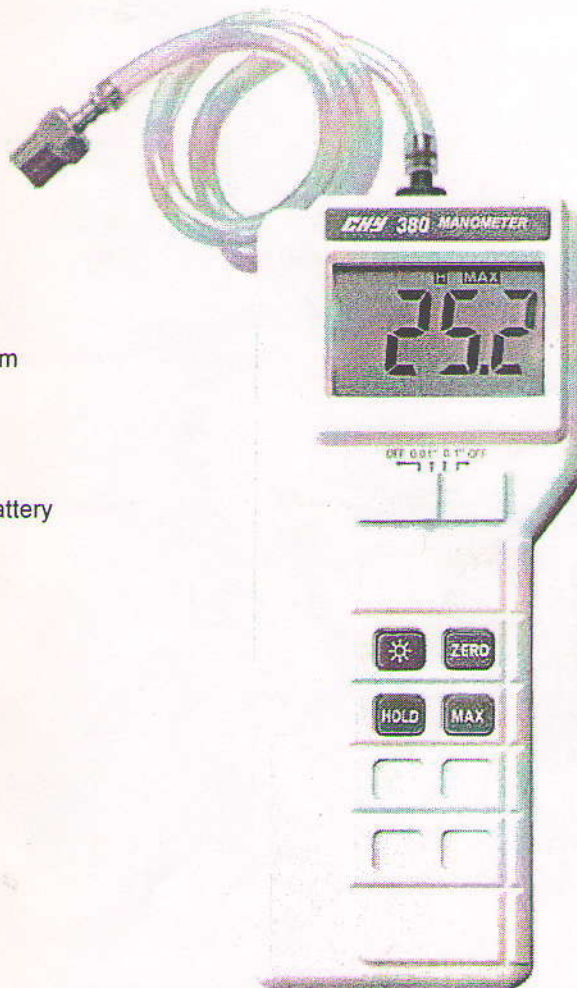

CHY FIREMATE CO., LTD.
NO.3 SHENG-LI 1ST STREET, HSIN-TIEN VILLAGE,
JEN-TZ HSIAO TAINAN HSIEN, TAINAN P.R.C.

Tel: 886-6-2794811

Fax: 886-6-2700227

E-Mail: chy@ksts.seed.net.tw