




Features

- ✦ Miniature, slim style design.
- ✦ Ideal for saving space on PCB
- ✦ Creepage distance of more than 8mm (Between coil and contact)
- ✦ High-sensitivity and low power dissipation
- ✦ 5KV minimum dielectric withstanding voltage (Between coil and contact)
- ✦ Wide coil permissive voltage range
- ✦ High contact capability (16A 250VAC-H TYPE)
- ✦ UL, CSA, TÜV, SEMKO

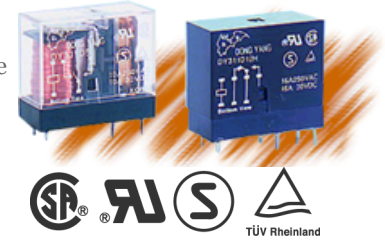

Typical Applications

- ✦ Remote controlled TV
- ✦ Copiers
- ✦ Vending machines
- ✦ Air conditioners
- ✦ Refrigerators
- ✦ Automobiles
- ✦ Industrial equipment, etc.

Ordering information



Model	No. of poles	Contact form	Coil voltage (VDC)	Contact ratings
Miniature	1 : Single pole	1 : Change over(C)	5, 6, 9, 12, 18, 24, 48	Nil : Standard type (10A)
High power	2 : Double pole	3 : Make (A)		H : High capacity (16A)
Relay		5 : Break(B)		Only for 1 Form A or B

Coil Ratings

Nominal Voltage(VDC)	Items	Coil Resistance ($\Omega \pm 10\%$)	Nominal Current (mA)	Pick-up voltage	Drop-out voltage	Max. voltage	Coil power dissipation
				% of nominal voltage			
5		50	100	80 Max.	10 Min.	130 Max.	Approx. 0.5W
6		72	83.3				
9		160	56.3				
12		285	42.1				
18		640	28.1				
24		1,150	20.9				
48		4,600	10.4				

Note : The rated current and resistance are measured at a coil temperature of 20°C with tolerances of 10%