

K-Type Thermometer

Model: 500 Single input


Model: 501 Dual input

Features:

- CE-Mark approval
- 3½ digit 2000 counts with high resolution
- Display back-light
- T1, T2 input channel and T1-T2 function (CHY501)
- K-type thermocouple input °C or °F announced
- Reading HOLD & MAX function (CHY500)
- Reading MAX function (CHY501)
- User-selective resolution 0.1°/1°
- Highly accurate with basic 0.1%
- According to temperature standard ITS-90

Specifications:

Display: 3½ digit liquid crystal display (LCD) with a maximum reading of 1999.

Low battery indication: The "  " is displayed when the battery voltage drops below the operating level.

Measurement rate: 2.5 times/second.

Operating environment: 0°C to 50°C, <70% R.H.

Storage environment: -20°C to 60°C, 0 to 80% R.H. with battery removed from meter.

Accuracy: Stated accuracy at 23°C ±5°C, <75% R.H..

Accuracy specification does not include type K thermocouple probe accuracy.

Dimensions: 195mm(H) x 92mm(W) x 53mm(D).

Weight: Approx. 250g. (including battery)

Temperature:

Range: -50°C to 1300°C, -58°F to 1999°F


K-type (CHROMEL-ALUMEL)

Accuracy: ±(0.3%rdg + 1°C) on -50°C to 1000°C


±(0.5%rdg + 1°C) on 1000°C to 1300°C

±(0.3%rdg + 2°F) on -58°F to 1999°F

Single Input

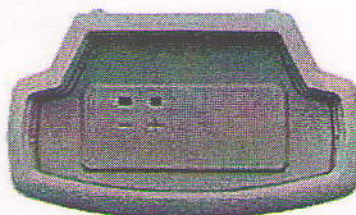

Dual Input

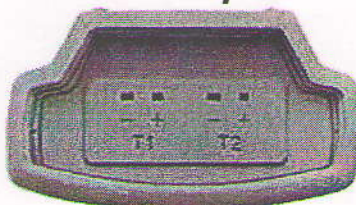

CHY FIREMATE CO., LTD.
NO.3 SHENG-LI 1ST STREET HSIANG-TIEN VILLAGE
JEN-TE-HSIANG TAIWAN HSIEN, TAIWAN R.O.C

Tel: 886-6-2794811

Fax: 886-6-2700227

E-Mail: chy@ksfs.seed.net.tw