


UVAMETER

MODEL: 732

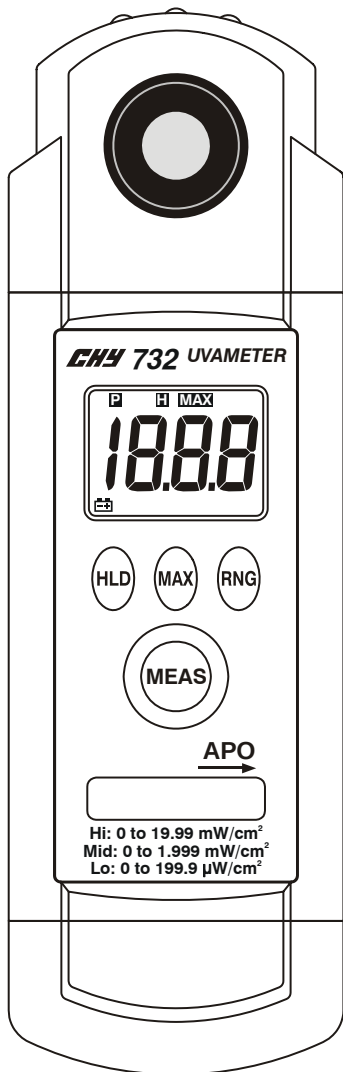

FEATURES:

CE-Mark Approval.
 Auto power off function.
 Portability and simplicity one hand operation.
 Three Ranges: 199.9 $\mu\text{W}/\text{cm}^2$
 1.999 mW/cm^2
 19.99 mW/cm^2
 With MAX/DATA HOLD function.
 With pocket hook.
 Hand-Held lightweight design.
 Ultra-violet irradiance measurement for UVA.
 UV detector spectrum from 320nm to 400nm.

SPECIFICATIONS

Display: 3½ digit liquid crystal display (LCD) with a maximum reading of 1999.
 Polarity: Automatic, positive implied.
 Low battery indication: The "E" is displayed when the battery voltage drops below the operating level.
 Operating environment: 0°C to 50°C at <75% R.H.
 Storage temperature: -20°C to 60°C, 0 to 80% R.H. with battery removed from meter.
 Accuracy: Stated accuracy at 23°C±5°C, <75% R.H.
 Battery: 1.5V x 3 pcs AAA size.
 Dimensions: 155mm(H) x 48mm(W) x 24mm(D).
 Weight: Approx. 2.9 oz. (81.2g) including batteries.

UVA

Sensor: UV Photo diode
 Range: 199.9 $\mu\text{W}/\text{cm}^2$
 1.999 mW/cm^2
 19.99 mW/cm^2
 Accuracy: ±(4% FS ± 2 dgts), (FS: full scale)
 UV Sensor Spectrum: Band pass 320 to 400nm

CHY FIREMATE CO., LTD.
 NO.3 SHENG-LI 1ST STREET, HSIN-TIEN VILLAGE,
 JEN-TE HSIANG, TAINAN HSIEN, TAIWAN R.O.C.
 TEL: 886-6-2794811 FAX: 886-6-2700227
 E-Mail: chy@ksts.seed.net.tw Ver. 1.062107

Customer Approved By:	Prepared By:
	Bruce Hsieh Engineer Manager CHY