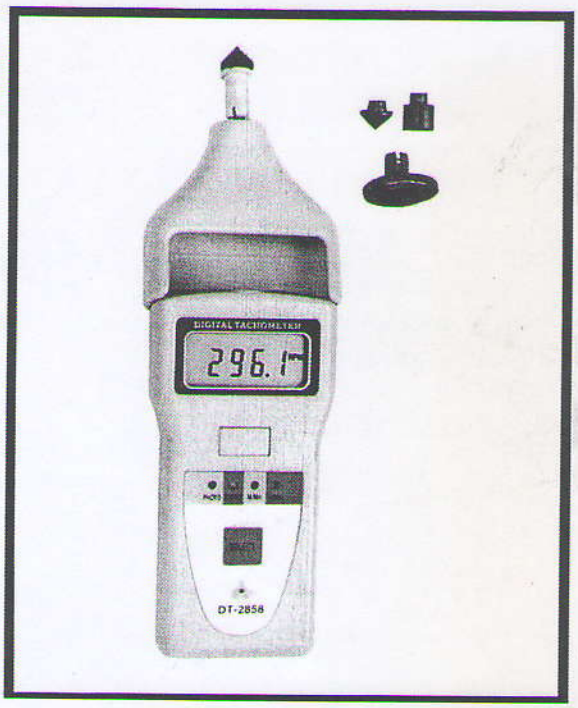

HAND TACHOMETER

CONTACT & NON-CONTACT

DT-2858

- **DT-2858**
  0.1 rpm resolution
- **DT-2858**
  MIN/MAX memory,
- **DT-2858**
  In contact adapter
  Rubber tip
  Surface speed wheel

- Non-contact and contact measeurement using an adapter
- 2.5 ~ 99999 rev/min measuring range
- easy operation, rpm unit display
- multi-function, MIN/MAX memory,

شرکت مهندسی
ره آوران مدار سپاهان

SPECIFICATIONS (MAIN UNIT)

Model	DT-2858
Measuring Range	Photo Tach. : 2.5 ~ 99,999 RPM Contact tach. : 2.5 ~ 19,999 RPM Surface speed : 0.05 ~ 1,999.9 m/Min 0.2 ~ 6,560 ft/Min
Resolution	0.1 RPM (2.5 ~ 999.9 RPM) 1 RPM (Over 1,000 RPM)
Accuracy	0.05% + 1 RPM
Sampling Time	1 Sec. Over 60 RPM
Display	Display : 5 digits, 10 mm LCD Battery alarm : ▬ mark
	Display unit : RPM , m/Min , ft/Min Memory Display: Max , Min , LA(last memory)
Auto Power-off	Automatic
Measuring Method	Non-contact measurement using the main unit (use with reflective tape) Contact measurement using the in-contact adapter (use with rubber tip, surface speed wheel)
Measuring Distance	50 to 150 mm (Typical max. 300 mm)
Power Supply	4 pieces of AA alkaline battery
Operating Temperature	0~50°C no condensation
Dimension/ Weight	215 X 74 X 32 mm / 280 g

Accessories include : Carrying case,Reflective tape marks,RPM adaptor(Cone)
RPM adaptor (funnel) , surface speed test wheel
and operation manual