


MS2600**ELECTRICAL TESTER**

MS2600 IS AN OPEN JAW DIGIT ELECTRICAL TESTER. THERE ARE DCV, ACV, ACA, Ω , CAP, FREQUENCY, DIODE TEST, CONTINUITY TEST AND DUTY CYCLE TEST FUNCTION. OTHERWISE THERE ARE AUTO AND MANUAL RANGE, RELATIVE MEASUREMENT, DATA HOLD, AND BACKLIGHT AUTO OFF TIME LIMIT MODE. TEST LEADS CAN BE INSERTED ON GROOVE OF BACK OF THE TESTER.



- MEETS IEC1010-1 CONCERNING SAFETY REQUIREMENTS.
- DISPLAY: 3999 COUNTS.
- DCV: 4/40/400V $\pm 0.7\%$, 1000V $\pm 0.8\%$
- ACV: 4/40/400V $\pm 0.8\%$, 700V $\pm 1.0\%$
- ACA: 200A $\pm 3.0\%$ (50Hz to 400Hz)
- RESISTOR: 400/4k/40k/400k/4M Ω $\pm 1.2\%$, 40M Ω $\pm 2.0\%$
- CAP: 40n/400n/4 μ F $\pm 4.0\%$
- FREQUENCY: 10Hz to 100kHz $\pm 2.0\%$
- DUTY CYCLE: 0.1% to 99.9%
- BACKLIGHT AUTO OFF TIME LIMIT MODE.
- POWER: BATTERY 6F22 (9V) x 1
- SIZE: 192 x 68 x 43mm
- WEIGHT: Approx. 230g.

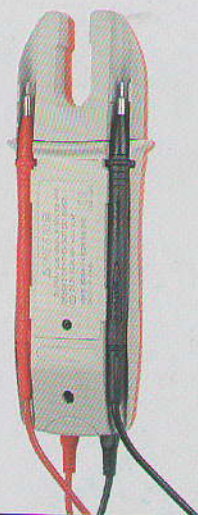